




This user guide contains the following chapters:

1. How to assemble your PoolGobbler Pro
2. How to install your PoolGobbler Pro
3. Optimizing your PoolGobbler Pro
4. Maintenance of PoolGobbler Pro

Please carefully read this user guide before proceeding to the installation.

**1. THE PARTS OF YOUR POOLGOBBLER PRO**

Take all parts from the box and arrange them in front of you as shown on the picture, remove the orange sleeve (a2) from the connector (a).

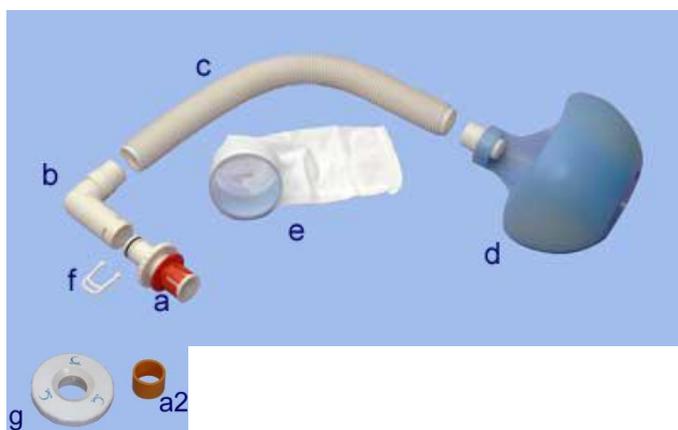

- a** = universal connector
  - a2** = flexible sleeve of the universal connector
  - b** = elbow
  - c** = flexible hose
  - d** = floating head
  - e** = holder with its filter bag
  - f** = clip
  - g** = cover
- parts **a2** en **g** will only be needed in special cases.

**TO ASSEMBLE:**

Slide hose **c** onto elbow **b** and push firmly until it clicks. Do the same for the hose and the floating head **d**.

Slide holder **e** with the filter bag, from the inside out, leading the filter bag to the outside (on the picture from left to right). Push the holder firmly into the skimmer head.



Parts **a** and **f** will be used later.

**2. INSTALLATION OF YOUR POOLGOBBLER PRO.**

If your pool is equipped with inlet jets (this usually is the case) then proceed to paragraph **2A. CONNECTING TO AN INLET JET**. If the water inlet of your pool is a smooth pipe (for example a Desjoyaux pool) then proceed to paragraph **2B. CONNECTING TO A SMOOTH PIPE**.

**2A. CONNECTING TO AN INLET JET**

First you have to determine to which inlet you wish to connect your PoolGobbler Pro.

Select the inlet jet such that **PoolGobbler Pro can create its circular flow without any perturbation.**

The picture shows a quite standard pool with three inlets and two skimmers. The PoolGobbler should **never** be connected to inlet jet C because either A or B would disturb the circular flow. PoolGobbler has to be connected to either A or B. We choose to connect our PoolGobbler Pro to **inlet jet A**. To avoid inlet jets B and C to perturbate the circular flow, the circular flow should go straight from inlet jet A to inlet jets C and B, counter clockwise. To achieve this we install PoolGobbler Pro with its filter bag pointing to inlet B.



**INSTALLATION:**


- Switch off the pump.
- Unscrew the cover of the inlet you have selected and remove the directional ball (it will no longer be needed).
- Insert the toothed end of the Universal connector into the opening of the cover until the red rim touches the cover. In case the opening is too small to insert the Universal connector replace it by part G and try again. If this also fails proceed to paragraph **2B. CONNECTING TO A SMOOTH PIPE**.
- Fasten the universal connector by turning the white wheel on the connector: the teeth will spread thus locking the connector to the cover.
- Put the cover with the universal connector back on the inlet jet and screw it onto it.
- Slide the PoolGobbler with its elbow B over the end of the Universal Connector (you may have to push quite firmly) and secure with clip F (see picture).



Switch on the pump and continue with **3 – OPTIMIZING YOUR POOLGOBBLER PRO**

#### **2B. CONNECTING TO A SMOOTH PIPE.**

Make sure that the pump still is switched off. Slide flexible sleeve A2 back onto the Universal Connector (picture).

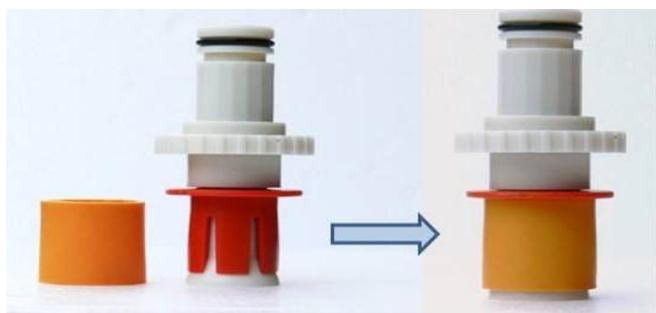

If the inlet is a smooth pipe, we recommend to sand the inside to ensure a better grip.

Insert the toothed end with the sleeve into the opening of the inlet until the red rim touches the pool side. Fasten it by turning the white wheel while holding the far end of the connector.

Slide the PoolGobbler Pro with its elbow B over the end of the Universal Connector (you may have to push quite firmly) and secure with clip F.

NOTE: It might occur that the connector doesn't go in completely. This can be solved by sliding a flange over the orange sleeve (available at any DIY-plumbing dept, external diameter 70mm, internal diameter 40mm, 6 mm thick).

#### **3. OPTIMIZING YOUR POOLGOBBLER PRO.**

Now your PoolGobbler Pro can be adjusted for optimal performance. Please be aware that it might take several tries to have it work at its best. Make sure that the pump is switched on.

##### **a) POSITIONING YOUR POOLGOBBLER PRO.**

Make sure that the floating head **d** is in a horizontal position on the water surface.

PoolGobbler Pro will automatically position itself alongside the wall, so it will not be in the way. If it does not position itself completely alongside, you can achieve this by slightly turning the end of the hose at the elbow (**b**) side.

##### **b) POSITIONING OF THE NOZZLE OF THE FLOATING HEAD.**

The position of the nozzle of the floating head greatly determines the efficacy of the PoolGobbler. It should be  $\frac{3}{4}$  under /  $\frac{1}{4}$  above the

water level. If this is not the case its level can be adjusted by slightly turning elbow **b** at the side of the connector **a**.

##### **c) ADJUSTING THE PRESSURE.**

The pressure of the water streaming into the pool is important: if the water flows too slowly, the captured debris might flow back into the pool, if the water flows too fast, the debris might bounce back into the pool.

If the water flows too slowly, its speed can be increased by partly closing the other inlet jets. You can do this by turning the directional ball in these jets such that the opening of the directional ball is partly blocked by the cover.

If the water flows too fast you can reduce the speed by turning the pressure adjustment ring on elbow **b** such that the opening pointing downwards is open (the opening on top should always be closed!).



#### **4. MAINTENANCE OF YOUR POOLGOBBLER PRO**

Your PoolGobbler Pro requires very little maintenance. Its installation is once off, which means that it does not need to be removed during the season. If you cover your pool during the night or a longer absence the cover can be put over your PoolGobbler.

##### **a) EMPTYING THE FILTER BAG.**

The filter bag should be emptied before it is half full.

Switch off the pump and take holder **e** with the filter bag from the PoolGobbler.

Empty the filter bag, when it is damaged it should be replaced, if it is just dirty it can be washed.

Put the filter bag back onto the holder and slide it back into the floating head.

Switch on the pump.

##### **b) HIBERNATING YOUR POOLGOBBLER PRO.**

When you prepare your pool for the winter season do as follows:

If the PoolGobbler Pro is connected to a cover remove the cover from the inlet jet together with the PoolGobbler still attached to it. Remove the filter bag, clean the PoolGobbler with lukewarm soapy water and store it .

If the PoolGobbler Pro is connected to a smooth pipe or connected directly into the opening of the inlet jet, you can remove it by turning the big white wheel.

Remove the filter bag, clean the PoolGobbler with lukewarm soapy water and store it .